

Specifically designed
for indoor handling



Ideal in confined spaces



A 55 SC
A 60 SC
A 70 SC
A 80 SC

MAIN FEATURES

- Capacity / Centre of gravity:
5,500 - 6,000 - 7,000 - 8,000 kg / 600 mm
- Voltage: 96 V
- Tyres: cushion
- 2 AC front drive motors integrated in front axle for fast manoeuvring in tight spaces
- Automatic parking brake
- Electric dynamic braking
- Travel speed: 14 km/h
- Lifting speed: 0.3 m/s
- Battery: 96 V
 - Pb: maximum capacity 1032 Ah
 - Li-Ion: maximum capacity 600 Ah
- Advanced multifunction display (AMD)
- Automatic rear camera
- High tilt cylinders
- Automatic speed reduction when cornering
- Side battery extraction system

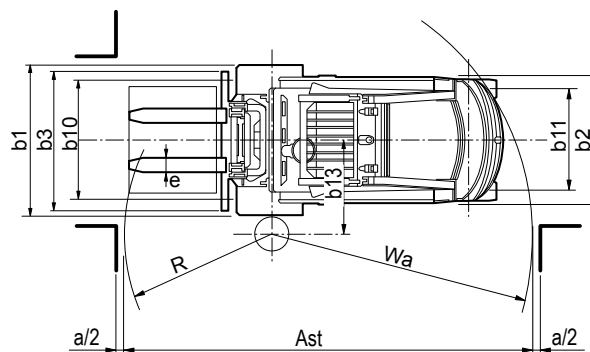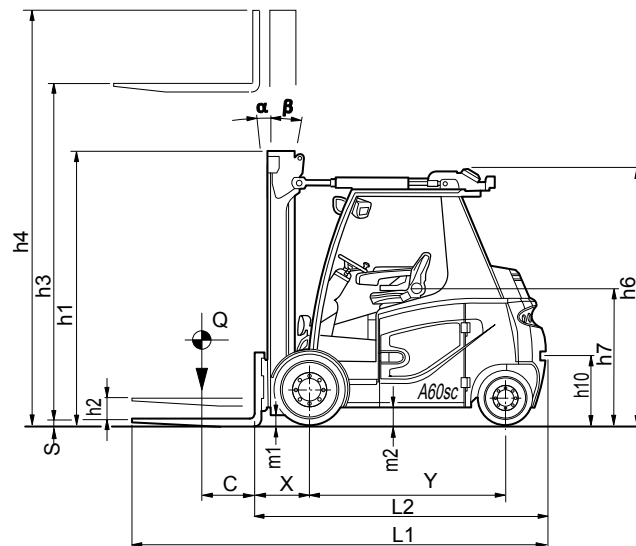

THE BENEFITS OF CHOOSING CARER

The ASC series forklifts are extremely compact (narrow and short) and ideal for indoor handling in particularly cramped areas.



The vehicle guarantees the operator maximum comfort with its spacious seat and an integrated armrest with mini levers and control buttons

The steering wheel is tiltable and height-adjustable. The driving position provides excellent visibility in all directions. The access to the forklift is eased by a non-slip step and a large handle. The mast is designed to achieve the widest horizon of visibility.

The laminated profiles and the six bearings ensure resistance to bending and twisting in every application. The tilting cylinders, integrated into the roof structure, increase load stability and residual capacity.

All the forklift functions are operated by advanced electronic inverters that control the two AC traction motors and the lifting process, both with high efficiency and low maintenance needs.

Side battery extraction is quick and easy.



Optional



Joystick, radio, heating, air conditioning, electronic key access, weight indicator system, front camera and many other accessories.

			C.A.R.E.R. Srl				
			A55SC	A60SC	A70SC	A80SC	
FEATURES	1.1	Manufacturer					
	1.2	Manufacturer's type designation					
	1.3	Drive	electric	electric	electric	electric	
	1.4	Operator type	seat	seat	seat	seat	
	1.5	Load capacity/rated load	Q (t)	5,5	6	7	8
	1.6	Load centre distance	C (mm)	600	600	600	600
	1.8	Load distance	X (mm)	600 (1) (2)	600 (1) (2)	600 (1) (2)	620 (1) (2)
	1.9	Wheelbase	Y (mm)	1780	1780	1930	2085
WEIGHTS	2.1	Weight	(kg)	9783	10233	10995	11830
	2.2	Axle loading, laden front / rear	(kg)	13714 / 1569	14597 / 1636	16197 / 1798	18060 / 1770
	2.3	Axle loading, unladen front / rear	(kg)	4510 / 5273	4550 / 5683	4840 / 6155	5380 / 6450
WHEELS	3.1	Tyres type		CHS	CHS	CHS	CHS
	3.2	Tyre size, front		711x305x559	711x305x559	711x356x559	711x406x559
	3.3	Tyre size, rear		559x203x406	559x229x406	559x229x406	559x254x406
	3.5	Wheels, number front rear (x = driven wheels)		2X/2	2X/2	2X/2	2X/2
	3.6	Track width, front	b10 (mm)	1015	1064	1064	1120
	3.7	Track width, rear	b11 (mm)	1050	1030	1030	1050
	DIMENSIONS	4.1	Tilt of mast / fork carriage forward / backward	α/β (°)	5/8(2)	5/8(2)	5/8(2)
4.2		Closed mast height	h1 (mm)	2525	2525	2680	2800
4.3		Free lift	h2 (mm)	100	100	100	100
4.4		Lift (standard mast)	h3 (mm)	3400	3400	3400	3400
4.5		Height, mast extended	h4 (mm)	4250	4250	4520	4650
4.7		Height of overhead guard	h6 (mm)	2460	2460	2460	2460
4.8		Seat height	h7 (mm)	1360	1360	1360	1360
4.12		Coupling height	h10 (mm)	430	430	430	430
4.19		Overall length	L1 (mm)	4000	4000	4150	4320
4.20		Length to face of forks	L2 (mm)	2800	2800	2950	3120
4.21		Overall width	b1/b2 (mm)	1320	1320	1420	1520
4.22		Fork dimensions	exsxL (mm)	150x50x1200	150x60x1200	150x60x1200	150x60x1200
4.23		Fork carriage iso 2328/30, FEM/A,B		4A	4A	4A	4A
4.24		Fork-carriage width	b3 (mm)	1200	1200	1300	1300
4.31		Ground clearance, laden, below mast	m1 (mm)	150	150	150	150
4.32		Ground clearance, centre of wheelbase	m2 (mm)	170	170	170	170
4.33		Aisle width for pallets 1000x1200 crossways	Ast (mm)	4300	4310	4465	4620
4.34		Aisle width for pallets 800x1200 lengthways	Ast (mm)	4500	4510	4665	4820
4.35		Turning radius	Wa (mm)	2500	2500	2655	2800
4.36		Internal turning radius	b13 (mm)	850	850	880	940
PERFORMANCE	5.1	Travel speed, laden / unladen	(km/h)	14 / 14	14 / 14	14 / 14	14 / 14
	5.2	Lift speed, laden / unladen	(m/s)	0,21 / 0,3	0,21 / 0,3	0,2 / 0,31	0,2 / 0,3
	5.3	Lowering speed, laden / unladen	(m/s)	0,41 / 0,39	0,41 / 0,39	0,48 / 0,38	0,5 / 0,4
	5.5	Drawbar pull, laden / unladen (S2 60°)	(N)	7400 / 8100	7200 / 8000	6900 / 7800	6600 / 7700
	5.6	Max. drawbar pull, laden / unladen (S2 5°)	(N)	27300 / 28100	27100 / 27900	26800 / 27800	26500 / 27600
	5.7	Gradeability, laden / unladen (S2 30°)	(%)	8,3 / 13,8	7,5 / 12,7	6,6 / 11,7	5,9 / 10,7
	5.8	Max. gradeability, laden / unladen (S2 5°)	(%)	16,6 / 25	15,5 / 22	13,7 / 21	12 / 20
	5.9	Acceleration time, laden / unladen (10 m)	(s)	5 / 4,5	5,2 / 4,5	4,8 / 4,7	4,8 / 4,7
	5.10	Service brake: mech./hydr./electr.		hydraulic/electric	hydraulic/electric	hydraulic/electric	hydraulic/electric
	MOTOR / BATT.	6.1	Drive motor rating (S2 60°)	(kW)	2x13,5	2x13,5	2x13,5
6.2		Lift motor rating (S3 20%)	(kW)	30	30	30	30
6.4		Battery voltage	U (V)	96	96	96	96
6.4.1		Rated capacity	K5 (Ah)	620 / 640 TENSOR / 688 IRONCLAD	620 / 640 TENSOR / 688 IRONCLAD	775 / 840 TENSOR / 860 IRONCLAD	930 / 990 TENSOR / 1032 IRONCLAD
6.5		Battery weight minimum/maximum	(kg)	1700 / 1900	1700 / 1900	2200 / 2400	2650 / 2800
OTHERS	8.1	Type of drive control		inverter	inverter	inverter	inverter
	8.2	Operating pressure for attachments	(bar)	200	200	200	200
	8.4	Sound level at the driver's ear	(dBA)	72	72	72	72

(1) With positioner and TW sideshift integrated in the mast.

(2) Depending on kind of mast.

Wheels tyre legend: SE super elastic - SEG super elastic twins - CHS cushion - PN pneumatic - VLK vulkolan; for tires NO MARKING - OIL RESISTANT, please contact CARER.

The performance data refer to a forklift truck in perfect working condition, with battery weight corresponding to the values given in 6.5.

In accordance with VDI Guideline 2198 this specification sheet provides details of the standard truck only. Non-standard tyres, different masts, optional equipment, etc. may result in different values.

The CARER products and specifications are subject to change without notice.



C.A.R.E.R. Srl

via Copernico 13
48033 Cotignola (RA) Italy

phone +39 0545 1938010

fax +39 0545 908070

www.carerforklift.com

info@carerforklift.com

follow us on  